STANDARD RACK

KEY FEATURES

- Supports 19" rack-mount equipment designed for two-post panel mounting like patch panels and network switches.
- Easy positioning of equipment with marked and numbered rack-mount spaces.
- Quick attachment of equipment with threaded equipment mounting holes and included equipment-mounting screws.
- Delivers unassembled in a single carton
 — quick and easy bolt-together assembly
 takes less than 10 minutes.
- Lightweight aluminum construction for easy transport and positioning during installation.
- Quickly attach any CPI vertical cable manager to the side of the rack through pre-punched web channel holes.
- Floor-mount holes on the base angles make it easy to secure the rack to the floor with a concrete, wood or raised floor installation kit.

APPLICATIONS

- Use Standard Rack with vertical and horizontal cable managers to support interconnect and network equipment in telecommunications rooms, equipment rooms and data centers.
- Use with shelves to support other equipment.

USE WITH

- MCS Master Cabling Section
- CCS Combination Cabling Section
- Global Vertical Cabling Section
- Universal Horizontal Cable Manager
- Rack and Frame Installation Kit
- Raised Floor Rack Support For 3" Channel

RELATED ACCESSORIES

- 3" Channel Rack-To-Runway Mounting Plate
- Vertical Power Strips for Racks
- Rack Shelves



Standard Rack is a high quality, cost-effective storage solution for patch panels and network switches. Standard Rack uses less floor space than a cabinet or a four-post rack. The small 20.3"W x 15"D footprint makes Standard Rack the best choice in many telecommunications and equipment rooms, especially where floor space is limited.

Standard Rack meets project specifications. Standard Rack will hold 1,000 lb of equipment and is UL Listed as a communications circuit accessory. Standard Rack supports 19" wide rack-mount equipment or shelves and is available in three heights. Equipment attaches to the front or rear of the 3" deep vertical mounting channels with screws. Equipment mounting positions are marked and numbered making it easy to position and install equipment or shelves.

Racks deliver unassembled in a compact carton. Standard Rack is easy to assemble. Components bolt together with included hardware, assembly takes approximately 10 minutes. Two-post racks must be secured to building structure. Standard Rack has pre-punched base angles making it easy to attach the rack to the floor. Use a CPI installation kit for wood, slab or raised floors.

Most Standard Rack applications require cable management. Vertical cable managers attach directly to the side of Standard Rack. CPI cable managers organize cables by-rack-mount-space simplifying future moves, adds and changes to the network. The best solution includes horizontal managers in between patch panels and network switches to fan patch cords into individual port connections.

See reverse for product selection. Contact CPI Technical Support for configuration assistance.



CHATSWORTH PRODUCTS, INC.

800-834-4969 techsupport@chatsworth.com www.chatsworth.com

PRODUCT DATA SHEET

STANDARD RACK

SPECIFICATIONS

- Open floor-mount two-post rack supports 19" wide rack-mount equipment
- For indoor use only, in environmentally controlled areas; may not be used outdoors, in industrial or harsh environments, or in plenum spaces
- Available sizes: Heights: 84", 96", 108" Width: 20.3" Depth: 15"
- Equipment space: Heights: 45 RMU, 51 RMU, 58 RMU Width: 19" EIA (17-3/4" clearance) Depth: 20"D Note: Double-sided shelves for 26"D equipment are available. Use QuadraRack[™] 4-Post Frame when rack-mount equipment exceeds 20"D.
- Equipment Support: 1 pair C-shaped equipment mounting channels fixed in place
 - 19"W, EIA-310-D compliant
 Universal hole pattern, 5/8"-5/8"-1/2" vertical hole spacing
 - Threaded #12-24 equipment mounting holes


Includes 50 each #12-24 equipment mounting screws

- Cable Management Use vertical and horizontal cable managers, sold as accessories
- Load capacity: 1,000 lb of equipment
- Certifications: EIA-310-D compliant UL Listed as a communications circuit accessory

 Material: Aluminum extrusion

- Construction: Bolted assembly Ships unassembled
- Finish: Clear grained aluminum or Epoxy-polyester hybrid powder coat paint Available in black, gray or computer white



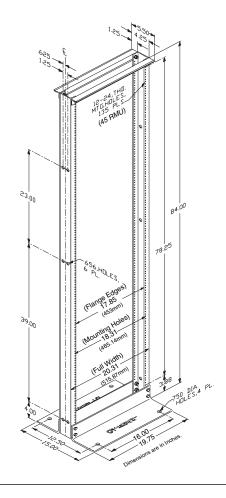

ORDERING INFORMATION

Standard Rack		
Part Number	Description	Shipping Weight
55053-X03	19"W x 84"H x 15"D, 45 RMU	31 lb
55053-X15	19"W x 96"H x 15"D, 51 RMU	37 lb
55053-X08	19"W x 108"H x 15"D, 58 RMU	40 lb

X=color: 1=Gray, 2=Computer White, 5=Clear, 7=Black

