
INTRODUCTION

The In Focus Systems LitePro® 610 and 620 multimedia projectors combine powerful and sophisticated features with easy-to-use, intuitive controls. Built-in multimedia features include high-fidelity stereo audio by JBL™, a palette of 16.7 million colors and Digital Light Processing™ (DLP) technology. The 600 series projectors are ideal for high-performance business, training and imaging applications that demand exceptional color quality. The 610 has VGA graphics, the 620 has SVGA graphics. The user interfaces of the two products are identical; information in this User's Guide applies to both products.

Image Resolution

LitePro 610

The VGA resolution of the projected image of the 610 is 640x480. The projector displays computer images that are 640x480 or lower just as they appear on your computer's monitor. Screen resolutions between 640x480 and 800x600 are compressed to 640x480. The projector cannot compress screen resolutions above 800x600. If your computer's screen resolution is higher than 800x600, reset it to a lower resolution before you connect the projector.

LitePro 620

The SVGA resolution of the projected image of the 620 is 800x600. The projector displays computer images that are 800x600 or lower just as they appear on your computer's monitor. Screen resolutions between 800x600 and 1024x768 are compressed to 800x600. The projector cannot compress screen resolutions above 1024x768. If your computer's screen resolution is higher than 1024x768, reset it to a lower resolution before you connect the projector.



NOTE: The 620 automatically expands 640x480 images to 800x600. You can display these images at 640x480 by turning off the Auto Resize feature. See "Auto Resize" on page 37 for more information.

Compatibility

The projector is compatible with a wide variety of computers and video devices, including:

- IBM-compatible computers, including laptops, up to 800x600 resolution (LitePro 610) or 1024x768 resolution (LitePro 620) at 60Hz.
- IBM PS/2 in VGA and MCGA modes.
- Apple Macintosh and PowerBook computers up to 800x600 resolution (LitePro 610) or 1024x768 resolution (LitePro 620).
- Various VCRs, camcorders and laser disc players.

The projector is not compatible with these systems:

- IBM-compatible computers in CGA or EGA graphics mode.
- Macintosh 128, 512, Plus, SE, SE/30 or Classic.

Unpacking the Projector

The projector comes with the parts shown in Figure 1. Check to make sure all are included. If any parts are missing, contact your In Focus dealer immediately.

If you are experienced in setting up presentation systems, use the *LitePro 610/620 Quick Start* card that was included in the shipping box. For complete details on connecting and operating the projector, refer to the appropriate sections of this User's Guide.



NOTE: *The contents of your shipping box may vary depending on the LitePro 610/620 configuration you ordered.*

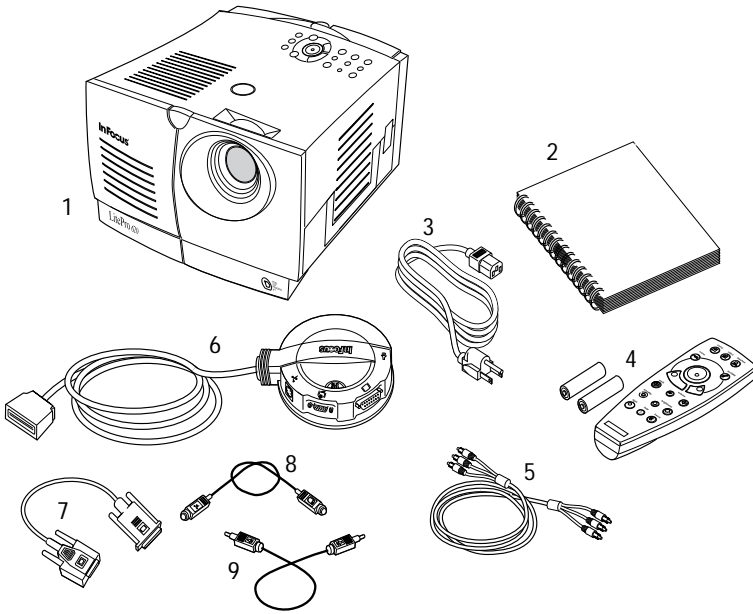


FIGURE 1

Shipping box contents

- | | |
|--|--|
| 1. LitePro 610 or 620 projector | 6. CableWizard |
| 2. <i>LitePro 610/620 User's Guide</i> | 7. CableWizard computer cable |
| 3. power cord | 8. CableWizard mouse cable |
| 4. remote and batteries | 9. CableWizard audio cable |
| 5. RCA audio/video (A/V) cable | Not shown: Quick Start card,
remote cable |

Usage Guidelines

- Do not look directly into the projection lens when the projector is turned on. The bright light may harm your eyes.
- The top and bottom of the projector can be very hot to the touch after use. Use extreme care or let it cool before lifting it.
- Do not block the grills at the front, side, top or bottom of the projector. Restricting the air flow through the projector can cause it to overheat and turn off.
- Handle the projector as you would any product with glass components. Be especially careful not to drop it.
- Avoid leaving the projector in direct sunlight or extreme cold for extended periods of time. If this happens, allow it to reach room temperature before use.
- Transport the projector in a vendor-approved hard or soft case. Call your In Focus dealer for more information.



NOTE: *If the projector overheats and turns off, you must wait 45 seconds before you attempt to turn it back on.*

If You Need Assistance

The first place to look for help is in this manual. Be sure to check the guidelines in “Troubleshooting” on page 45.

If this manual doesn’t answer your question, call your In Focus dealer. You can also call In Focus Customer Service directly at 1-800-799-9911. Call between 6 a.m. and 5 p.m. PST, Monday through Friday. In Europe, call In Focus in The Netherlands at (31) 23-5623200. In Singapore, call (65) 334-9005.

The In Focus World Wide Web address is <http://www.infs.com>.

Warranty

These products are backed by a limited one-year warranty. The details of the warranty are printed at the back of this manual. Longer term warranties can be purchased from your In Focus dealer. Refer to page 54 for part numbers.