



Sun Quad FastEthernet (QFE/P)

Codename: Gumby

**A16 / A20 / A21 / A22 / A23 / A25 / A26
A27 / A28 / A29 / A33 / A34 / A35 / A36 / A41**

Netra t1 / Netra T1 / Netra 20

Sun Fire V120 / Netra 120

Netra t 1100/1120/1125 / Netra t 1400/1405 / Netra ft 1800

E3000 / E4000 / E5000 / E6000

E3500 / E4500 / E5500 / E6500


Sun Fire 4800 / 4810 / 6800

Sun Fire V480 / Sun Fire V880

Sun Fire 12K / Sun Fire 15K

Options 1034 / 6943

501-4366	501-5406	540-4094
3.3/5V 64Bit 33MHz	3.3/5V 64Bit 33MHz	Netra ft 1800 FRU

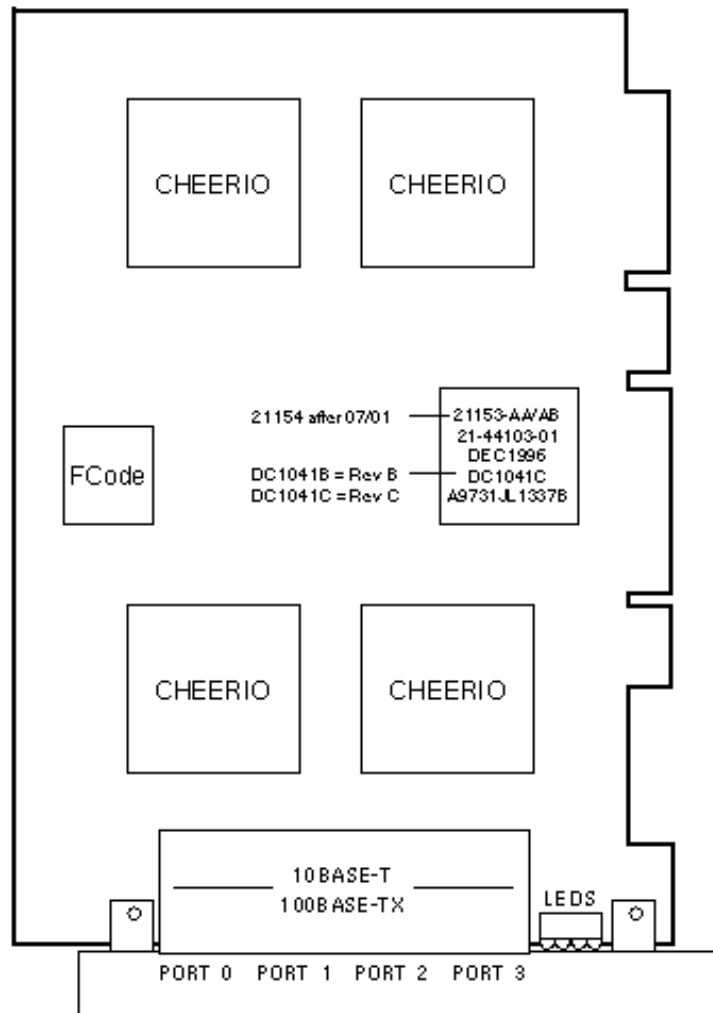

Notes

1. The minimum OS is Solaris 2.5.1 HW: 4/97 and Quad FastEthernet 2.0.
2. Solaris 2.6 requires QuadFastEthernet 2.1.
3. The Ultra 30, Netra T1, and Sun Blade 100 are not compatible with DC21153 Rev A or B. See BugIDs 4094903, 4432431, and 4615897.
4. One CPU per port is recommended for maximum throughput.
5. Two CPUs per QFE/P are recommended for ≥ 200 MHz systems.
6. Auto-negotiation is used to select operating mode and speed.

Reference

 [Sun Quad FastEthernet PCI Installation and Users Guide, 805-1797.](#)