


P4DPI-G2

Products ▶ Motherboards ▶ Xeon Boards ▶ [P4DPI-G2]

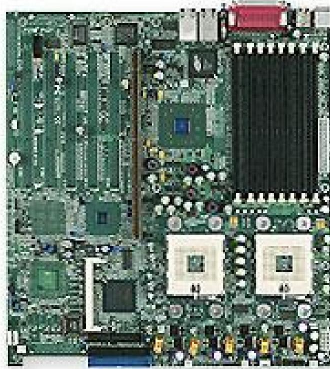

Key Features

1. Dual Intel® Xeon® Support up to 3.0 GHz
2. Intel® E7500 Chipset
3. Up to 16GB DDR 200 SDRAM
4. Intel® 82546EB Dual Port Gigabit Ethernet Controller
5. Dual ATA/100 IDE Channels
6. 1 x 64-bit PCI-X expansion slots
7. ATI RageXL 8MB PCI Graphic Controller

Links & Resources

- ▶ [Recommended Chassis](#)
- ▶ [Tested Memory List](#)
- ▶ [Motherboard Manual](#)
- ▶ [Update Your BIOS](#)
- ▶ [Download the Latest Drivers and Utilities](#)

Specifications

Physical Stats

Form Factor	Extended ATX
Dimensions	12" x 13.05" (30.5cm x 33.2cm)

Processor/Cache

CPU	<ul style="list-style-type: none"> • Dual mPGA603 ZIF Sockets • Supports up to two Intel® Xeon® processor(s) with 512KB of integrated Advanced Transfer Cache up to 3.0GHz
System Bus	400MHz system bus

System Memory

Memory Capacity	<ul style="list-style-type: none"> • Eight 184-pin DIMM sockets • Supports up to 16 GB DDR200 memory • Dual channel memory bus • Memory must be populated in pairs
Memory Type	DDR266/200 registered ECC SDRAM 72-bit, 184-pin gold-plated DIMMs
DIMM Sizes	128 MB, 256 MB, 512 MB, 1 GB, 2 GB
Memory Voltage	2.5 V only

On-Board Devices

Chipset	<ul style="list-style-type: none"> • Intel® E7500 chipset • MCH + ICH3-S + P64H2
IPMI	Support for Intelligent Platform Management Interface v.1.5 (Optional)
Network Controllers	<ul style="list-style-type: none"> • Dual Port Intel® 82546EB Gigabit Ethernet • Supports 10BASE-T, 100BASE-TX, and 1000BASE-T, RJ45 output
Graphics	ATI Rage XL SVGA PCI video controller with 8 MB of video memory

Input / Output

PCI Expansion	<ul style="list-style-type: none"> • 1x 64-bit 133/100/66MHz PCI-X (3.3V) slot • 1x SXB (Supermicro Extended Bus) slot
----------------------	--

Chassis (Optimized for P4DPI-G2)

2U Chassis	<ul style="list-style-type: none"> • SC822i-400RC
Important Note	To ensure system stability, a 350W (minimum) ATX power supply [8-pin +12V AND (20 or 24-pin)] is required.

System BIOS

BIOS Type	4Mb Flash EEPROM with Phoenix® BIOS
BIOS Features	<ul style="list-style-type: none"> • Plug and Play (PnP) • SMBIOS 2.3 • DMI 2.1 • ACPI 1.0 • Hardware BIOS virus protection

Management

Software / Hardware	<ul style="list-style-type: none"> • Optional IPMI (Intelligent Platform Management Interface) 1.5 • Super Doctor III • Watch Dog
Power Configurations	<ul style="list-style-type: none"> • ACPI/APM Power Management • Main Switch Override Mechanism • Wake-On-Ring (WOR) header • Wake-On-LAN (WOL) header • Keyboard Wakeup from Soft-Off • CPU Fan auto-off in sleep mode • Power-on mode control for AC power loss recovery • Internal/External modem remote ring-on

PC Health Monitoring

CPU	<ul style="list-style-type: none"> • Monitors for CPU Cores, +1.8V, +3.3V, +5V, ±12V, 3.3V Standby • CPU Core 3-Phase-switching voltage regulator with auto-sense from 1.3V-1.5V • Adjustable CPU clock frequency ratio settings (via BIOS)
------------	--

IDE	<ul style="list-style-type: none"> • Dual EIDE channels support up to four UDMA IDE devices • Supports UDMA Mode 5, PIO Mode 4, and ATA/100
USB	Up to 5 USB ports
Serial Ports	2 Fast UART 16550 serial ports
Parallel Port	1 ECP / EEP parallel port
Floppy	1 Floppy controller; 1.44 MB, 2.88 MB, 3-mode support
Keyboard / Mouse	PS/2 keyboard and mouse ports

FAN	<ul style="list-style-type: none"> • Total of seven 3-pin fan headers • 3x fans with tachometer monitoring • Overheat backup fan connector • Status monitor with firmware/software on/off control
Temperature	<ul style="list-style-type: none"> • Monitoring for CPU, chassis, environment • CPU thermal trip support
LED	<ul style="list-style-type: none"> • CPU Overheat LED • System Overheat LED • Suspend-state indicator LED
Other Features	<ul style="list-style-type: none"> • Chassis intrusion detection • Chassis intrusion header • Chipkill support

Parts List

Standard Bulk Package

	Part Number	Qty	Description
P4DPI-G2	MBD-P4DPI-G2-B	1	P4DPI-G2 Motherboard (Bulk Only)
Manual(s)	MNL-0659	1	Manual for P4DPI-G2
Retention Kits	SKT-095-604E	2	Pentium 4, Xeon Heatsink Retention with 603 & 604-pin socket
I/O Cables	CBL-022	1	ATX Floppy Cable
	CBL-036	1	ATA 66/100 IDE LP Cable
Driver Disk	CDR-INTC	1	Version 1.0 Chipset Driver CD
I/O Shield	CSE-PT7	1	I/O Shield for dual LAN

Note: Items in a Standard Retail Package may differ from items in a Standard Bulk Package.

[Terms & Conditions](#) | [Privacy](#) | [Investor Relations](#)

Copyright © 2009 Super Micro Computer, Inc.

Information in this document is subject to change without notice.

Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.

Page Viewed: Monday, February 2, 2009: @06:37:55